



# TechBriefs

## Savannah River National Laboratory

U.S. DEPARTMENT OF ENERGY • SAVANNAH RIVER SITE • AIKEN • SC

[srnl.doe.gov](http://srnl.doe.gov)

### Benefits

- > Uses temperature-assisted pressure swing to store more gas in a smaller volume
- > Utilizes heat transfer systems already on a vehicle to control the gas temperature:
  - Radiator fluid and/or air conditioning coolant for heating (needed to maintain pressure and assist in gas release from adsorbents)
  - Air conditioning coolant for cooling (primarily for refueling)
- > Avoids the heat issues of conventional compressed gas storage

### Applications and Industries

- > Most applicable to automotive industry and other commercial markets that utilize (or plan to use) mobile gas storage (e.g., in forklifts, heavy machinery, and portable generators)
- > Could also be useful in stationary gas storage vessels needing both heating and cooling utilities

### Intellectual Property

- > Divisional patent based on US 9,683,704 B2 issued on 20 June 2017.
- > Technology Readiness Level (TRL) 2 or 3:
  - Basic system models created
  - Finite element analysis (FEA) models of several adsorbent tanks with internal heat exchangers created
  - Lab-scale prototype heat exchanger system built and demonstrated for hydrogen

### Contact Information

[partnerships@srnl.doe.gov](mailto:partnerships@srnl.doe.gov)



SRNL-L1160-2018-00035

## Integrated Onboard Vehicle Natural Gas Storage Heating and Cooling System


Savannah River National Laboratory has developed an integrated natural gas storage heating/cooling scheme that connects a vehicle's existing onboard heat-exchanger fluids to an adsorbent natural gas system to provide temperature swing capabilities to maximize the system's gas storage capacity.

### Need


Mass, volume, and cost are obstacles to designing new vehicle technologies to compete with gasoline/diesel internal combustion engines. Adapting an internal combustion engine to run on less expensive and lower emission natural gas, for example, can actually increase a vehicle's mass, volume, and cost because natural gas currently requires greater storage capacity than a gasoline/diesel tank, necessitating modifications to a vehicle's framework. Natural gas is normally stored on motor vehicles in high pressure tanks that use changes in pressure to charge and discharge the gas.

### Description

SRNL's integrated gas storage heating/cooling scheme connects the existing onboard heat exchanger fluids (with some possible augmentation) to an adsorbent such as activated carbon or a metal-organic framework. With this design, the same amount of natural gas can be stored in a volume comparable to current gasoline/diesel tanks at a lower pressure than conventional natural gas storage, which also reduces both cost and mass. In addition, by using the onboard heat exchanger fluids, SRNL's integrated gas storage heating/cooling scheme also avoids the heat issues that plague conventional compressed gas storage.

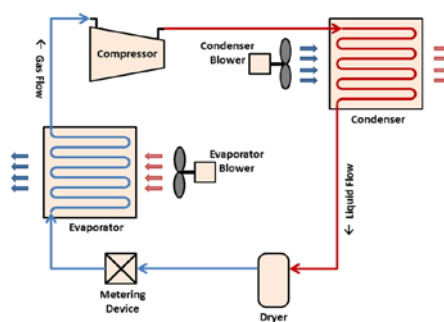

Standard automotive air conditioning system diagram

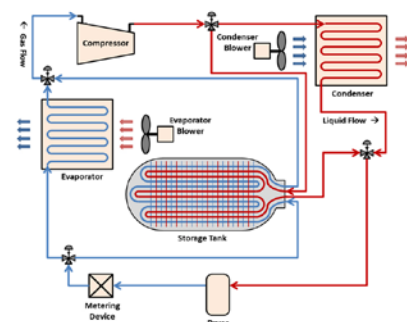

Automotive air conditioning schematic for a thermal fluid by-pass to an adsorbent storage vessel to heat or cool the vessel in place of the condenser or evaporator, respectively.